




SPRA-RITE™ Injector Manifold Assemblies

Complete and Patented Solution

Our SPRA-RITE application solutions rely upon pressurized lubricant encapsulated within the manifold assembly until the injection cycle is initiated. Each manifold has a means of generating the required lubricant pressure.

SPRA-RITE injector manifold assemblies include the manifold, pressure regulator, injectors, and injector coils.

For customers who only require an injector manifold assembly for use with an existing SPRA-RITE processor, we offer a manifold package that includes the injector, the manifold/enclosure interface, pressure regulator and pressure gauge.

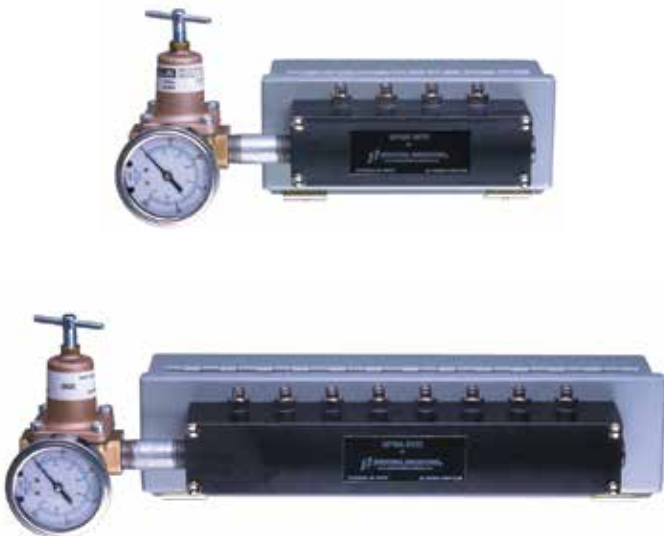


SPRA-RITE Custom Injector Manifold Assembly Features

- 2, 4, 6, 8 and 10 injectors
- Independent volume control of each injector and a minimum spray time of 20 milliseconds
- Manufactured using high speed injector valves, NEMA enclosures, pressure regulators and pressure gauges
- Capable of connecting to press controls
- 1/8", 3/16" and 1/4" fittings
- 24V or 110V coils
- Different valves available for high pressure applications

Additional System Offerings

PRO-MIX Proportional Mixing Stations

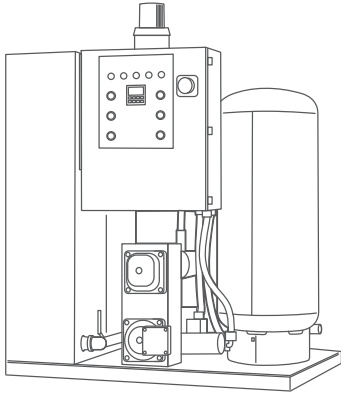

PRO-MIX I

Compact, gravity-fed mixing station for smaller facilities.

PRO-MIX III

Simple, gravity-fed station with 20-gallon lubricant mixture capacity.

PRO-MIX V

Pump-operated station offering one-mixture of lubricant.

PRO-MIX V Dual

One lubricant type can be mixed at two different mixing stations, each at a different ratio.


PRO-MIX V Double

Designed to mix and store blends from two different lubricant types.

PRO-MIX V Triple

One lubricant type can be mixed at three different mixing stations, each at a different ratio.

SPRA-RITE Application Systems

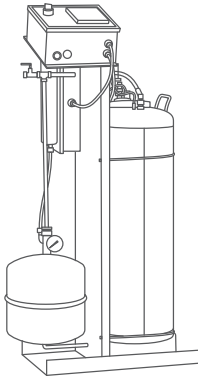

High Pressure Pedestal

For thick, emulsified lubricants and rich dilution.

Low Pressure Pedestal

For application of a wide variety of lubricants.

Alpha

Effective turnkey lube application solution suited for smaller pressrooms.

Ultra-Lube

For atomizing of highly viscous lubricants into ultra-fine spray.

COMPONENTS

Manifolds

- 2, 4, 6, 8, 10 injectors
- Quick Change Die manifolds offer “one-click” disconnect and connect of multiple hoses to die

Controls

Alpha


- Independent control of up to 6 injectors for volume and stroke

Beta


- Independent control of up to 48 injectors for lubricant volume, stroke count, time delay
- 200 pattern spray profiles
- Automatic or manual control

Nozzles

- Patented SPRA-RITE HP or Ultra-Fine
- 99.5% drip-free



Reclaim-PRO Purification and Recycling Units

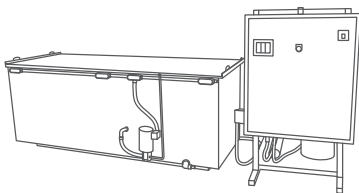

Coolant purification systems separate oil from water, helping reduce lubrication requirements by as much as 70% while also decreasing machine downtime. In four different sizes.

Reclaim-PRO 5

Reclaim-PRO 11

Reclaim-PRO 22

Reclaim-PRO 33