




SPRA-RITE™ Ultra Lube System

Atomized Spray for High Viscosity Lubricants

A turnkey solution for applying highly viscous lubricants up to 800 cps, the lube is atomized with air into an ultra-fine spray at the nozzle. The nozzles are air-controlled and each injector can be controlled independently. The Ultra Lube system includes an injector manifold, Beta controls, tank, nozzles and tubing.

SPRA-RITE Ultra Lube Features

- Ultra-compact air atomizing spray nozzle
- Flat or cone patterns
- 0~220 mL/min
- Fully adjustable flow control
- 2, 4, 6, 8 or 10 injector manifold
- 200 part storage recipes
- Independent skip cycle counting
- Independent delay spray
- Independent volume control
- Control up to 10 individual spray nozzles
- Operator lock-out capability
- Magnetic mount
- 5 gallon stainless steel tank

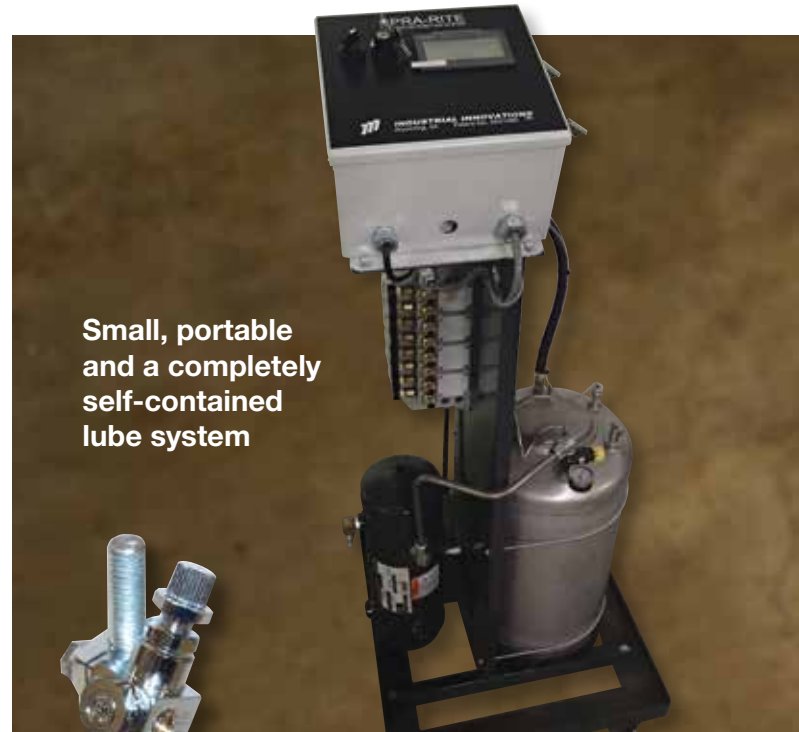

Small, portable and a completely self-contained lube system




System does not include nozzles. Need to be purchased separately

Ultra Lube System	Viscosity Range	Reservoir Capacity	Manifolds	Displacement	Part Recipes	Controls
	< 800 CPS	5 gal	2, 4, 6, 8 and 10	Air over oil	200	Beta

Ultra Lube Zero-Drip Nozzles	Spray Angle Degree	Available Volume (gpm) @ 40 PSI	Mount Styles
	Flat or Cone	0~220 mL/min	Magnetic and Die Mount Bases

Additional System Offerings

PRO-MIX Proportional Mixing Stations

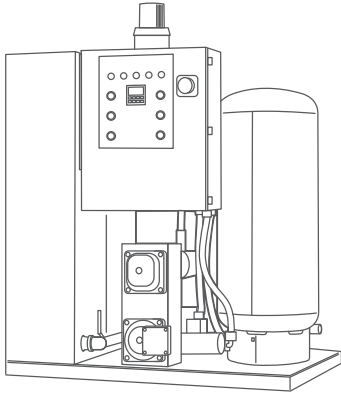

PRO-MIX I

Compact, gravity-fed mixing station for smaller facilities.

PRO-MIX III

Simple, gravity-fed station with 20-gallon lubricant mixture capacity.

PRO-MIX V

Pump-operated station offering one-mixture of lubricant.

PRO-MIX V Dual

One lubricant type can be mixed at two different mixing stations, each at a different ratio.


PRO-MIX V Double

Designed to mix and store blends from two different lubricant types.

PRO-MIX V Triple

One lubricant type can be mixed at three different mixing stations, each at a different ratio.

SPRA-RITE Application Systems

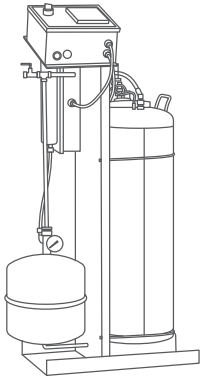

High Pressure Pedestal

For thick, emulsified lubricants and rich dilution.

Low Pressure Pedestal

For application of a wide variety of lubricants.

Alpha

Effective turnkey lube application solution suited for smaller pressrooms.

Ultra-Lube

For atomizing of highly viscous lubricants into ultra-fine spray.

COMPONENTS

Manifolds

- 2, 4, 6, 8, 10 injectors
- Quick Change Die manifolds offer “one-click” disconnect and connect of multiple hoses to die

Controls

Alpha


- Independent control of up to 6 injectors for volume and stroke

Beta

- Independent control of up to 48 injectors for lubricant volume, stroke count, time delay
- 200 pattern spray profiles
- Automatic or manual control

Nozzles

- Patented SPRA-RITE HP or Ultra-Fine
- 99.5% drip-free



Reclaim-PRO Purification and Recycling Units

Coolant purification systems separate oil from water, helping reduce lubrication requirements by as much as 70% while also decreasing machine downtime. In four different sizes.

Reclaim-PRO 5

Reclaim-PRO 11

Reclaim-PRO 22

Reclaim-PRO 33

