



# SPRA-RITE™ Zero-Drip Lubricant “Z” Series Nozzles

## Dripless Solutions Across Applications

Our patented “Z” series lubricant application nozzles incorporate a unique design to effectively apply lubricants to specific areas of the stamping or drawing tooling and/or the stock with virtually zero drip. The High Velocity or HV-style spray lubricator nozzle assembly combines low pressure with high velocity to produce the most effective means for the controlled application of lubricants, helping to eliminate costly waste.


See back for complete ordering information.



## SPRA-RITE “Z” Series Nozzles Features

- 99.5% drip-free
- No strainers, springs or ball checks
- Patented technology
- Choice of volume and spray angles
- Styles for application of thick, emulsified lubricants
- Precise application control
- Lightweight construction
- Universally adjustable
- Magnetic or Die Mounts available

# Z-Nozzle Ordering Information

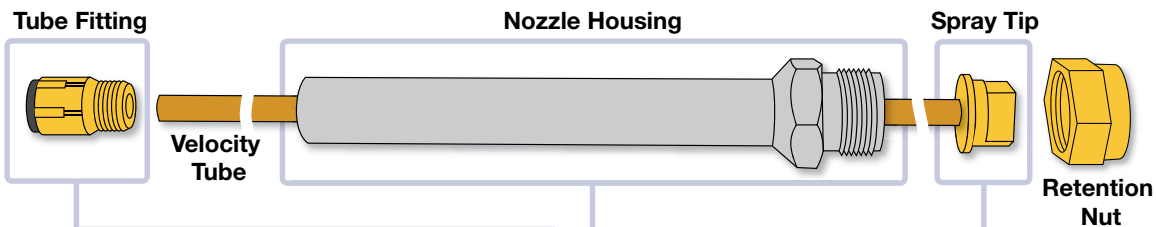

**High-Velocity  
Z-Nozzle Model**


**HV - MB - L-1/8 - 4 - 65015**

Highlighted items below indicate their use in this example order string.


Body Configurations	Low or High Volume Fittings	Housing Lengths	Spray Tip Angles
<b>MB</b> Magnetic Base  Fully adjustable mount with magnetic base.	<b>L1/8</b> Low 1/8" NPT L5/32 Low 5/32" NPT H3/16 High 3/16" NPT H1/4 High 1/4" NPT	2 2-Inches Long <b>4</b> 4-Inches Long	25 25-Degrees 40 40-Degrees <b>65</b> 65-Degrees 80 80-Degrees 110 110-Degrees
<b>0</b> No Base  Body and nozzle assy.			<b>Spray Tip Volumes</b> 01 0.1-GPM <b>015</b> 0.15-GPM 02 0.2-GPM 03 0.3-GPM 04 0.4-GPM

## Other Systems Offered


### PRO-MIX Proportional Mixing



### SPRA-RITE Fluid Application



### Reclaim-PRO Fluid Purification



Individual spray tips can be ordered by simply requesting the angle and volume as a single string; ie. 01565

Flow rates are listed at 40-PSI.