



# SPRA-RITE™ Alpha System

## Reliable, Turnkey, Value Solution

Our SPRA-RITE Alpha System is an effective, reliable, and simple turnkey lube application solution for smaller pressroom applications. It provides a complete system inclusive of an injector manifold, Alpha controls, tank, nozzles and tubing. As with our other systems, it's airless and comes with our patented zero-drip "Z" nozzles, offering independent control of volume and stroke.

### SPRA-RITE System Features

- 2, 4 or 6 injector manifold
- Independent control of up to six injectors for volume and stroke
- Nozzle purge and test feature
- Skip cycle capability
- 5-gallon stainless steel tank
- Simple program modification using data display and function buttons
- 99.5% drip-free "Z" nozzles




System	Max Fluid Pressure	Reservoir Capacity	Manifolds	Displacement	Part Recipes	Controls
SPRA-RITE Alpha	100 psi	5 gal	2, 4, 6	Air over oil	0	Alpha

Note: See our "Z" Nozzle flyer for the variety of nozzles that you can include with this system.

# Additional System Offerings

## PRO-MIX Proportional Mixing Stations

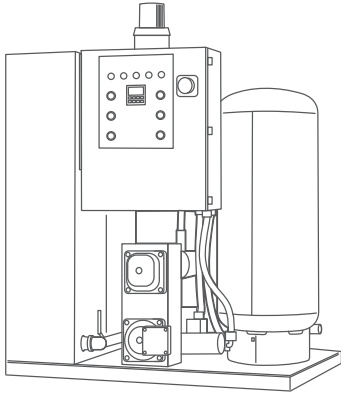

### PRO-MIX I

Compact, gravity-fed mixing station for smaller facilities.

### PRO-MIX III

Simple, gravity-fed station with 20-gallon lubricant mixture capacity.

### PRO-MIX V

Pump-operated station offering one-mixture of lubricant.

### PRO-MIX V Dual

One lubricant type can be mixed at two different mixing stations, each at a different ratio.


### PRO-MIX V Double

Designed to mix and store blends from two different lubricant types.

### PRO-MIX V Triple

One lubricant type can be mixed at three different mixing stations, each at a different ratio.

## SPRA-RITE Application Systems

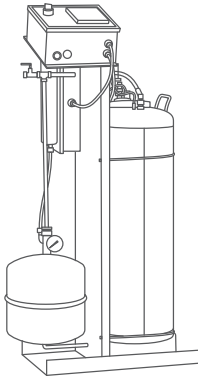

### High Pressure Pedestal

For thick, emulsified lubricants and rich dilution.

### Low Pressure Pedestal

For application of a wide variety of lubricants.

### Alpha

Effective turnkey lube application solution suited for smaller pressrooms.

### Ultra-Lube

For atomizing of highly viscous lubricants into ultra-fine spray.

## COMPONENTS

### Manifolds

- 2, 4, 6, 8, 10 injectors
- Quick Change Die manifolds offer “one-click” disconnect and connect of multiple hoses to die

### Controls

#### Alpha


- Independent control of up to 6 injectors for volume and stroke

#### Beta

- Independent control of up to 48 injectors for lubricant volume, stroke count, time delay
- 200 pattern spray profiles
- Automatic or manual control

### Nozzles

- Patented SPRA-RITE HP or Ultra-Fine
- 99.5% drip-free



## Reclaim-PRO Purification and Recycling Units

Coolant purification systems separate oil from water, helping reduce lubrication requirements by as much as 70% while also decreasing machine downtime. In four different sizes.

### Reclaim-PRO 5

### Reclaim-PRO 11

### Reclaim-PRO 22

### Reclaim-PRO 33

